



1080p Indoor/Outdoor IP  
Camera with Infrared and  
3x Optical Zoom

Model: UVC-Pro

QUICK START GUIDE

## Introduction

Thank you for purchasing the Ubiquiti Networks™ UniFi® Video Camera PRO. This Quick Start Guide is designed to guide you through the installation of the camera and show you how to access the Camera Configuration Interface. This Quick Start Guide also includes the warranty terms.

The UniFi® Video software and User Guide are available for download at **[downloads.ubnt.com/unifivideo](https://downloads.ubnt.com/unifivideo)**

## Package Contents



Camera



PoE Adapter  
(48V, 0.5A)



Power Cord



Hex  
Keys



Metal  
Strap



Pan Head Screws  
(M4x30, Qty. 4)



Screw Anchors  
(Qty. 4)



Ethernet  
Sleeve



Mounting  
Template



Quick Start  
Guide

## Installation Requirements

### Wall-Mounting:

- Drill
- Drill bit, 7 mm
- Hole saw, 45 mm (optional)
- Phillips screwdriver

### Pole-Mounting:

- Screwdriver or 7 mm socket driver


**TERMS OF USE:** Shielded Ethernet cable and earth grounding must be used as conditions of product warranty. TOUGHCable™ is designed for outdoor installations. It is the customer's responsibility to follow local country regulations, including operation within legal frequency channels, output power, and Dynamic Frequency Selection (DFS) requirements.

## Optional Accessories

Ubiquiti Networks offers additional accessories that can be purchased for use with the UniFi Video Camera PRO. For accessory installation instructions, refer to the Quick Start Guide that accompanies the product.


### Cable Accessory (UVC-Pro-C)

The UniFi Video Camera PRO Cable Accessory provides additional connectivity options for UniFi Video Camera PRO, including audio in/out and mFi® mPort options. There is also a reset button and PoE/Ethernet connector.

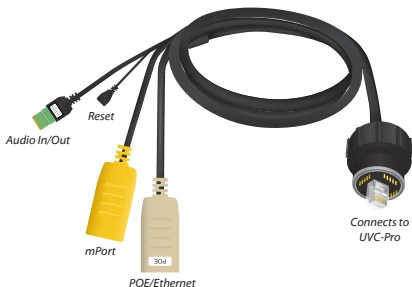


### Large Pole Mount (UVC-Pro-M)

The UniFi Video Camera PRO Large Pole Mount accommodates larger poles up to 160 mm wide.

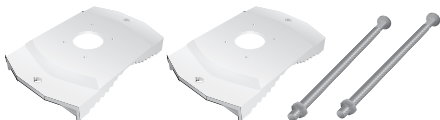


## Hardware Overview

### Camera Adjustment

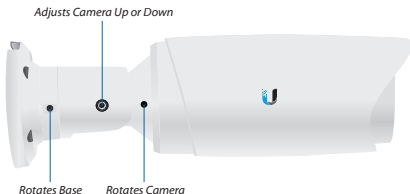

### Waterproof Gland

The UniFi Video Camera PRO has a waterproof gland for connecting Ethernet. Below are the components that make up the waterproof gland:

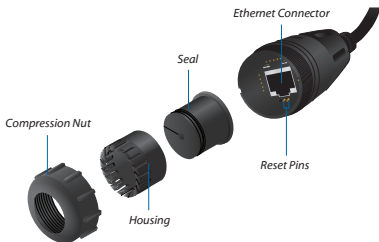

To reset the UniFi Video Camera PRO to factory default settings, use the hex keys or an electric conductor to short the pins. (The two *Reset Pins* are called out in the diagram above.)

## Installation Overview


The installation process differs depending on if you are mounting the camera on a wall or on a pole. Follow the instructions for the installation that you are performing.

### Wall Mount

1. Remove the adhesive *Mounting Template* from the backing and place the label on the wall where you want the camera.



2. Use a 7 mm drill bit to drill the four anchor holes in the wall.  
(Optional) If threading the cabling through the wall, drill the center hole using a 45 mm hole saw.
3. Insert the four *Screw Anchors* into the wall.

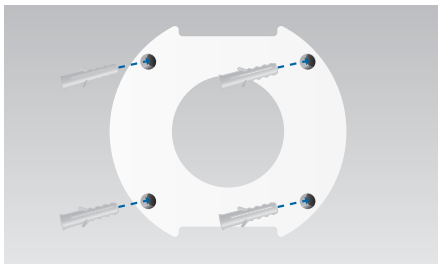

4. Thread the cabling through the wall or one of the recessed areas on the *Mounting Bracket Base*.



**Note:** There are two recessed areas for an Ethernet cable on the *Mounting Bracket Base*. Place the Ethernet cable in the recessed area closest to your power source.

5. Use a Phillips screwdriver to secure the camera to the wall with the four *Pan Head Screws*.



Proceed to "Connecting Power and Ethernet".



640-00059-03

## Pole Mount

To mount the camera on a pole, use the included *Metal Strap*:

1. Open the *Metal Strap* by turning the locking screw counter-clockwise.



2. Slide the *Metal Strap* through the back of the camera.



3. Wrap the *Metal Strap* around the pole. Use a screwdriver or 7 mm socket drive to turn the locking screw clockwise and securely fasten the strap to the pole.




## Connecting Power and Ethernet

1. Disassemble the waterproof gland by turning the *Compression Nut* counter-clockwise.



2. Separate the *Seal* from the *Housing*.




3. Insert the Ethernet cable through the *Compression Nut* and the *Housing*. Ensure the threads of the *Compression Nut* face the notches on the *Housing*.



4. Wrap the *Seal* around the Ethernet cable.



5. Slide the *Seal* into the *Housing*.



6. Connect the Ethernet cable to the *Ethernet Connector* on the camera.



Optional Step: The included *Ethernet Sleeve* can be placed over the Ethernet connector to allow the cable to be removed easier.



7. Enclose the waterproof gland by turning the *Compression Nut* clockwise. Turn the *Compression Nut* until the *Seal* extrudes slightly from the end of the *Compression Nut*.



**Note:** The *Seal* should be extruding from the *Compression Nut* when properly tightened to prevent water from entering.


8. Remove the protective plastic film from the camera lens.




9. Connect the other end of the Ethernet cable to one of the following:
- *PoE Adapter* Connect the camera to the Ethernet port labeled **POE** on the included *PoE Adapter*.
  - *TOUGHSwitch PRO or Carrier* Connect the camera to a port with 48V power enabled and skip steps 10 and 11.



10. Connect an Ethernet cable from your LAN to the Ethernet port labeled **LAN** on the *PoE Adapter*.



11. Connect the other end of the power cord to a power outlet.

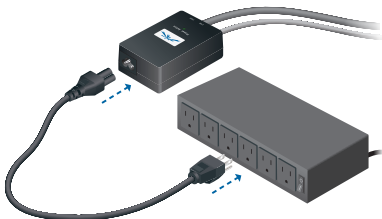

## UniFi Video

The UniFi Video software is pre-installed on the UniFi NVR (sold separately). If you do not have the UniFi NVR, you can download and install the latest version of the UniFi Video software at **[downloads.ubnt.com/unifivideo](https://downloads.ubnt.com/unifivideo)**; the UniFi Video auto-management feature should automatically detect and install your new camera(s).

The screenshot shows the UniFi Video web interface. On the left is a sidebar with navigation links: CAMERAS, VIDEO, RECORDING, ANALYTICS, USERS, SETTINGS, and LOGS. The main area is titled 'CAMERAS' and contains a table with columns: NAME, MODEL, HOST, and FIRMWARE. The table lists several cameras, including 'AirCam #1', 'AirCam #2', 'Bullet #2', 'Bullet #1', 'Bullet #3', and 'AirCam Dome IR'. To the right of the table is a configuration panel for 'Bullet #3'. This panel has tabs for 'GENERAL', 'VIDEO', 'RECORDING', 'FIRMWARE', and 'EVENTS'. The 'GENERAL' tab is active, showing fields for Host (192.168.1.101), Name (Bullet #3), Username, Password, and NVR Assignment (Unassigned). An 'APPLY CHANGES' button is at the bottom right of the configuration panel.

Proceed to *Adjusting the Camera View*.

## Camera Configuration Interface

Access the Camera Configuration Interface if you have not yet installed the UniFi Video software, or plan to use the UniFi Video Camera as a stand-alone camera without the UniFi Video software.

1. Ensure that your host machine is connected to the same LAN as the UniFi Video Camera.
2. The UniFi Video Camera is set to *DHCP* by default. If you have a router or DHCP server providing addresses on your network, please check your DHCP Client Table or download the Ubiquiti Discovery Tool from:  
**<http://www.ubnt.com/download#app>**




**Note:** If you do not have a DHCP server, the camera defaults to the IP address **192.168.1.20**.


3. Launch your web browser, and in the address field, type **https://** and then the IP address of the camera, for example: **https://192.168.1.20**. Press **enter** (PC) or **return** (Mac).




4. The login screen will appear. Enter **ubnt** in the *Username* and *Password* fields and click **Login**.

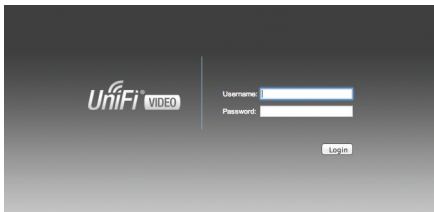

5. The *Main* screen will appear and you should see a live video stream from the UniFi Video Camera.

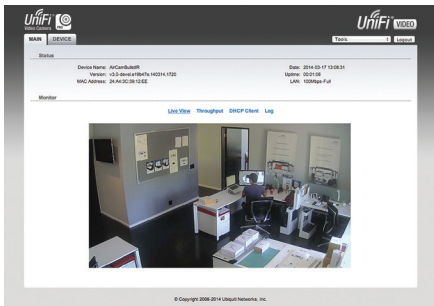

## Adjusting the Camera View

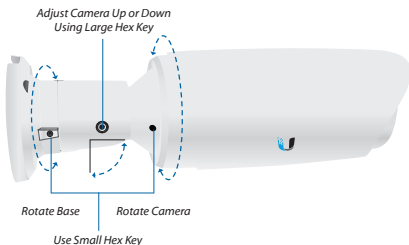

Ensure you have removed the protective plastic film from the camera lens.

For details on using the UniFi Video software, refer to our website at: [documentation.ubnt.com/unifivideo](http://documentation.ubnt.com/unifivideo)

# Specifications

| UniFi Video Camera PRO |                                           |
|------------------------|-------------------------------------------|
| Dimensions             | 322 x 100 x 100 mm (12.67 x 3.93 x 3.93") |
| Weight                 | 2.15 kg (4.73 lbs)                        |
| Ports                  | (1) 10/100 Ethernet Port                  |
| Sensor                 | 3M WDR Sensor                             |
| Lens                   | 3X Optical Zoom, f= 3-9 mm                |
| Infrared               | Yes                                       |
| Buttons                | Factory Reset Button                      |
| Power Method           | Passive PoE (48V, 0.5A), 802.3af          |
| Power Supply           | 48V, 0.5A PoE Adapter Included            |
| Max. Power Consumption | 12.5 W                                    |
| Certifications         | CE, FCC, IC                               |
| Mounting               | Pole/Wall/Ceiling Adapter Kit Included    |
| Protection Rating      | IP67 Waterproof                           |
| Operating Temperature  | -40 to 50° C (-40 to 122° F)              |
| Operating Humidity     | 20 - 90% Non-Condensing                   |

| Video              |                                                                           |
|--------------------|---------------------------------------------------------------------------|
| Video Compression  | H.264                                                                     |
| Resolution         | 1080p Full HD                                                             |
| Maximum Frame Rate | 30 FPS                                                                    |
| Image Setting      | Brightness, Contrast, Sharpness, Saturation, Noise Reduction, 50 Hz/60 Hz |

| General    |                                                                         |
|------------|-------------------------------------------------------------------------|
| Processor  | ARM 1136J-S 528 MHz                                                     |
| Memory     | 256 MB DDR3, 256 MB Flash                                               |
| View Angle | 44.4° W - 15.7° T (V)<br>81.0° W - 27.9° T (H)<br>94.0° W - 32.1° T (D) |

## Safety Notices

1. Read, follow, and keep these instructions.
2. Heed all warnings.
3. Only use attachments/accessories specified by the manufacturer.



**WARNING:** Do not point the camera toward the sun.

The sun's heat can damage the camera's internal components.



**WARNING:** Avoid using this product during an electrical storm. There may be a remote risk of electric shock from lightning.

## Electrical Safety Information

1. Compliance is required with respect to voltage, frequency, and current requirements indicated on the manufacturer's label. Connection to a different power source than those specified may result in improper operation, damage to the equipment or pose a fire hazard if the limitations are not followed.
2. There are no operator serviceable parts inside this equipment. Service should be provided only by a qualified service technician.
3. This equipment is provided with a detachable power cord which has an integral safety ground wire intended for connection to a grounded safety outlet.
  - a. Do not substitute the power cord with one that is not the provided approved type. Never use an adapter plug to connect to a 2-wire outlet as this will defeat the continuity of the grounding wire.
  - b. The equipment requires the use of the ground wire as a part of the safety certification, modification or misuse can provide a shock hazard that can result in serious injury or death.
  - c. Contact a qualified electrician or the manufacturer if there are questions about the installation prior to connecting the equipment.
  - d. Protective earthing is provided by Listed AC adapter. Building installation shall provide appropriate short-circuit backup protection.
  - e. Protective bonding must be installed in accordance with local national wiring rules and regulations.

## Limited Warranty

UBIQUITI NETWORKS, Inc (“UBIQUITI NETWORKS”) warrants that the product(s) furnished hereunder (the “Product(s)”) shall be free from defects in material and workmanship for a period of one (1) year from the date of shipment by UBIQUITI NETWORKS under normal use and operation. UBIQUITI NETWORKS’ sole and exclusive obligation and liability under the foregoing warranty shall be for UBIQUITI NETWORKS, at its discretion, to repair or replace any Product that fails to conform to the above warranty during the above warranty period. The expense of removal and reinstallation of any Product is not included in this warranty. The warranty period of any repaired or replaced Product shall not extend beyond its original term.

## Warranty Conditions

The above warranty does not apply if the Product:

- (I) has been modified and/or altered, or an addition made thereto, except by Ubiquiti Networks, or Ubiquiti Networks’ authorized representatives, or as approved by Ubiquiti Networks in writing;
- (II) has been painted, rebranded or physically modified in any way;
- (III) has been damaged due to errors or defects in cabling;
- (IV) has been subjected to misuse, abuse, negligence, abnormal physical, electromagnetic or electrical stress, including lightning strikes, or accident;
- (V) has been damaged or impaired as a result of using third party firmware;
- (VI) has no original Ubiquiti MAC label, or is missing any other original Ubiquiti label(s); or
- (VII) has not been received by Ubiquiti within 30 days of issuance of the RMA.

In addition, the above warranty shall apply only if: the product has been properly installed and used at all times in accordance, and in all material respects, with the applicable Product documentation; all Ethernet cabling runs use CAT5 (or above), and for outdoor installations, shielded Ethernet cabling is used, and for indoor installations, indoor cabling requirements are followed.

## Returns

No Products will be accepted for replacement or repair without obtaining a Return Materials Authorization (RMA) number from UBIQUITI NETWORKS during the warranty period, and the Products being received at UBIQUITI NETWORKS’ facility freight prepaid in accordance with the RMA process of UBIQUITI NETWORKS. Products returned without an RMA number will not be processed and will be returned freight collect or subject to disposal. Information on the RMA process and obtaining an RMA number can be found at: **[www.ubnt.com/support/warranty](http://www.ubnt.com/support/warranty)**.

## Disclaimer

EXCEPT FOR ANY EXPRESS WARRANTIES PROVIDED HEREIN, UBIQUITI NETWORKS, ITS AFFILIATES, AND ITS AND THEIR THIRD PARTY DATA, SERVICE, SOFTWARE AND HARDWARE PROVIDERS HEREBY DISCLAIM AND MAKE NO OTHER REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, REPRESENTATIONS, GUARANTEES, OR WARRANTIES OF MERCHANTABILITY, ACCURACY, QUALITY OF SERVICE OR RESULTS, AVAILABILITY, SATISFACTORY QUALITY, LACK OF VIRUSES, QUIET ENJOYMENT, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT AND ANY WARRANTIES ARISING FROM ANY COURSE OF DEALING, USAGE OR TRADE PRACTICE IN CONNECTION WITH SUCH PRODUCTS AND SERVICES. BUYER ACKNOWLEDGES THAT NEITHER UBIQUITI NETWORKS NOR ITS THIRD PARTY PROVIDERS CONTROL BUYER'S EQUIPMENT OR THE TRANSFER OF DATA OVER COMMUNICATIONS FACILITIES, INCLUDING THE INTERNET, AND THAT THE PRODUCTS AND SERVICES MAY BE SUBJECT TO LIMITATIONS, INTERRUPTIONS, DELAYS, CANCELLATIONS AND OTHER PROBLEMS INHERENT IN THE USE OF COMMUNICATIONS FACILITIES. UBIQUITI NETWORKS, ITS AFFILIATES AND ITS AND THEIR THIRD PARTY PROVIDERS ARE NOT RESPONSIBLE FOR ANY INTERRUPTIONS, DELAYS, CANCELLATIONS, DELIVERY FAILURES, DATA LOSS, CONTENT CORRUPTION, PACKET LOSS, OR OTHER DAMAGE RESULTING FROM ANY OF THE FOREGOING. In addition, UBIQUITI NETWORKS does not warrant that the operation of the Products will be error-free or that operation will be uninterrupted. In no event shall UBIQUITI NETWORKS be responsible for damages or claims of any nature or description relating to system performance, including coverage, buyer's selection of products (including the Products) for buyer's application and/or failure of products (including the Products) to meet government or regulatory requirements.

## Limitation of Liability

EXCEPT TO THE EXTENT PROHIBITED BY LOCAL LAW, IN NO EVENT WILL UBIQUITI OR ITS SUBSIDIARIES, AFFILIATES OR SUPPLIERS BE LIABLE FOR DIRECT, SPECIAL, INCIDENTAL, CONSEQUENTIAL OR OTHER DAMAGES (INCLUDING LOST PROFIT, LOST DATA, OR DOWNTIME COSTS), ARISING OUT OF THE USE, INABILITY TO USE, OR THE RESULTS OF USE OF THE PRODUCT, WHETHER BASED IN WARRANTY, CONTRACT, TORT OR OTHER LEGAL THEORY, AND WHETHER OR NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

## Note

Some countries, states and provinces do not allow exclusions of implied warranties or conditions, so the above exclusion may not apply to you. You may have other rights that vary from country to country, state to state, or province to province. Some countries, states and provinces do not allow the exclusion or limitation of liability for incidental or consequential damages, so the above limitation may not apply to you. EXCEPT TO THE EXTENT ALLOWED BY LOCAL LAW, THESE WARRANTY TERMS DO NOT EXCLUDE, RESTRICT OR MODIFY, AND ARE IN ADDITION TO, THE MANDATORY STATUTORY RIGHTS APPLICABLE TO THE LICENSE OF ANY SOFTWARE (EMBEDDED IN THE PRODUCT) TO YOU. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to any transactions regarding the sale of the Products.

## Compliance

### FCC

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operations of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

## Industry Canada

This Class A digital apparatus complies with Canadian CAN ICES-3(B).

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil numérique de la classe A est conforme à la norme NMB-3(B) Canada.

Pour réduire le risque d'interférence aux autres utilisateurs, le type d'antenne et son gain doivent être choisis de façon que la puissance isotrope rayonnée équivalente (PIRE) ne dépasse pas ce qui est nécessaire pour une communication réussie.

Cet appareil est conforme à la norme RSS Industrie Canada exempts de licence norme(s). Son fonctionnement est soumis aux deux conditions suivantes:

1. Cet appareil ne peut pas provoquer d'interférences et
2. Cet appareil doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement du dispositif.

## Australia and New Zealand



Warning: This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

## CE Marking

CE marking on this product represents the product is in compliance with all directives that are applicable to it.



# RoHS/WEEE Compliance Statement



## English

European Directive 2002/96/EC requires that the equipment bearing this symbol on the product and/or its packaging must not be disposed of with unsorted municipal waste. The symbol indicates that this product should be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electric and electronic equipment via designated collection facilities appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about the disposal of your old equipment, please contact your local authorities, waste disposal service, or the shop where you purchased the product.

## Deutsch

Die Europäische Richtlinie 2002/96/EC verlangt, dass technische Ausrüstung, die direkt am Gerät und/oder an der Verpackung mit diesem Symbol versehen ist, nicht zusammen mit unsortiertem Gemeindeabfall entsorgt werden darf. Das Symbol weist darauf hin, dass das Produkt von regulärem Haushaltsmüll getrennt entsorgt werden sollte. Es liegt in Ihrer Verantwortung, dieses Gerät und andere elektrische und elektronische Geräte über die dafür zuständigen und von der Regierung oder örtlichen Behörden dazu bestimmten Sammelstellen zu entsorgen. Ordnungsgemäßes Entsorgen und Recyceln trägt dazu bei, potentielle negative Folgen für Umwelt und die menschliche Gesundheit zu vermeiden. Wenn Sie weitere Informationen zur Entsorgung Ihrer Altgeräte benötigen, wenden Sie sich bitte an die örtlichen Behörden oder städtischen Entsorgungsdienste oder an den Händler, bei dem Sie das Produkt erworben haben.

## Español

La Directiva 2002/96/CE de la UE exige que los equipos que lleven este símbolo en el propio aparato y/o en su embalaje no deben eliminarse junto con otros residuos urbanos no seleccionados. El símbolo indica que el producto en cuestión debe separarse de los residuos domésticos convencionales con vistas a su eliminación. Es responsabilidad suya desechar este y cualesquiera otros aparatos eléctricos y electrónicos a través de los puntos de recogida que ponen a su disposición el gobierno y las autoridades locales. Al desechar y reciclar correctamente estos aparatos estará contribuyendo a evitar posibles consecuencias negativas para el medio ambiente y la salud de las personas. Si desea obtener información más detallada sobre la eliminación segura de su aparato usado, consulte a las autoridades locales, al servicio de recogida y eliminación de residuos de su zona o pregunte en la tienda donde adquirió el producto.

## Français

La directive européenne 2002/96/CE exige que l'équipement sur lequel est apposé ce symbole sur le produit et/ou son emballage ne soit pas jeté avec les autres ordures ménagères. Ce symbole indique que le produit doit être éliminé dans un circuit distinct de celui pour les déchets des ménages. Il est de votre responsabilité de jeter ce matériel ainsi que tout autre matériel électrique ou électronique par les moyens de collecte indiqués par le gouvernement et les pouvoirs publics des collectivités territoriales. L'élimination et le recyclage en bonne et due forme ont pour but de lutter contre l'impact néfaste potentiel de ce type de produits sur l'environnement et la santé publique. Pour plus d'informations sur le mode d'élimination de votre ancien équipement, veuillez prendre contact avec les pouvoirs publics locaux, le service de traitement des déchets, ou l'endroit où vous avez acheté le produit.

## Italiano

La direttiva europea 2002/96/EC richiede che le apparecchiature contrassegnate con questo simbolo sul prodotto e/o sull'imballaggio non siano smaltite insieme ai rifiuti urbani non differenziati. Il simbolo indica che questo prodotto non deve essere smaltito insieme ai normali rifiuti domestici. È responsabilità del proprietario smaltire sia questi prodotti sia le altre apparecchiature elettriche ed elettroniche mediante le specifiche strutture di raccolta indicate dal governo o dagli enti pubblici locali. Il corretto smaltimento ed il riciclaggio aiuteranno a prevenire conseguenze potenzialmente negative per l'ambiente e per la salute dell'essere umano. Per ricevere informazioni più dettagliate circa lo smaltimento delle vecchie apparecchiature in Vostro possesso, Vi invitiamo a contattare gli enti pubblici di competenza, il servizio di smaltimento rifiuti o il negozio nel quale avete acquistato il prodotto.

# Declaration of Conformity

|                         |                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Česky<br>[Czech]        | UBIQUITI NETWORKS tímto prohlašuje, že tento UBIQUITI NETWORKS device, je ve shodě se základními požadavky a dalšími požadavky ustanovenými směrnicí 1999/5/ES.                                                                                                                                                                                                              |
| Dansk<br>[Danish]       | Undertegnede UBIQUITI NETWORKS erklærer herved, at følgende udstyr UBIQUITI NETWORKS device, overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.                                                                                                                                                                                                    |
| Nederlands<br>[Dutch]   | <p>Hierbij verklaart UBIQUITI NETWORKS dat het toestel UBIQUITI NETWORKS device, in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.</p> <p>Bij deze verklaart UBIQUITI NETWORKS dat deze UBIQUITI NETWORKS device, voldoet aan de essentiële eisen en aan de overige relevante bepalingen van Richtlijn 1999/5/EC.</p> |
| English                 | Hereby, UBIQUITI NETWORKS, declares that this UBIQUITI NETWORKS device, is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.                                                                                                                                                                                               |
| Eesti<br>[Estonian]     | Käesolevaga kinnitab UBIQUITI NETWORKS seadme UBIQUITI NETWORKS device, vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.                                                                                                                                                                                  |
| Suomi<br>[Finnish]      | UBIQUITI NETWORKS vakuuttaa täten että UBIQUITI NETWORKS device, tyypinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.                                                                                                                                                                                      |
| Français<br>[French]    | Par la présente UBIQUITI NETWORKS déclare que l'appareil UBIQUITI NETWORKS, device est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.                                                                                                                                                                                 |
| Deutsch<br>[German]     | Hiermit erklärt UBIQUITI NETWORKS, dass sich diese UBIQUITI NETWORKS device, in Übereinstimmung mit den grundlegenden Anforderungen und den anderen relevanten Vorschriften der Richtlinie 1999/5/EG befindet.“ (BMW)                                                                                                                                                        |
| Ελληνική<br>[Greek]     | ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ UBIQUITI NETWORKS ΔΗΛΩΝΕΙ ΟΤΙ UBIQUITI NETWORKS device, ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1995/5/ΕΚ.                                                                                                                                                                                                  |
| Magyar<br>[Hungarian]   | Alulírott, UBIQUITI NETWORKS nyilatkozom, hogy a UBIQUITI NETWORKS device, megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.                                                                                                                                                                                                       |
| Íslenska<br>[Icelandic] | Hér með lýsir UBIQUITI NETWORKS yfir við UBIQUITI NETWORKS device, er í samræmi við grunnkröfur og arar kröfur, sem gerar eru í tilskipun 1999/5/EC.                                                                                                                                                                                                                         |
| Italiano<br>[Italian]   | Con la presente UBIQUITI NETWORKS dichiara che questo UBIQUITI NETWORKS device, è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.                                                                                                                                                                                |
| Latviski<br>[Latvian]   | Ar šo UBIQUITI NETWORKS deklarāciju, ka UBIQUITI NETWORKS device, atbilst Direktīvas 1999/5/EK prasībām un citiem ar to saistītiem noteikumiem.                                                                                                                                                                                                                              |

|                             |                                                                                                                                                                                                               |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Lietuviškai<br>[Lithuanian] | UBIQUITI NETWORKS deklaruoja, kad šis UBIQUITI NETWORKS įrenginys atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.                                                                     |
| Malti<br>[Maltese]          | Hawnhekk, UBIQUITI NETWORKS, jiddikjara li dan UBIQUITI NETWORKS device, jikkonforma mal- ti ijjiet essenzjali u ma provvedimenti o rajn relevanti li hemm fid-Dirrettiva 1999/5/EC.                          |
| Norsk<br>[Norwegian]        | UBIQUITI NETWORKS erklærer herved at utstyret UBIQUITI NETWORKS device, er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.                                                 |
| Slovensky<br>[Slovak]       | UBIQUITI NETWORKS týmto vyhlasuje, že UBIQUITI NETWORKS device, spĺňa základné požiadavky a v etky príslušné ustanovenia Smernice 1999/5/ES.                                                                  |
| Svenska<br>[Swedish]        | Härmed intygar UBIQUITI NETWORKS att denna UBIQUITI NETWORKS device, står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.             |
| Español<br>[Spanish]        | Por medio de la presente UBIQUITI NETWORKS declara que el UBIQUITI NETWORKS device, cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE. |
| Polski<br>[Polish]          | Niniejszym, firma UBIQUITI NETWORKS o wiadcza, że produkt serii UBIQUITI NETWORKS device, spełnia zasadnicze wymagania i inne istotne postanowienia Dyrektywy 1999/5/EC.                                      |
| Português<br>[Portuguese]   | UBIQUITI NETWORKS declara que este UBIQUITI NETWORKS device, está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.                                                          |
| Română<br>[Romanian]        | Prin prezenta, UBIQUITI NETWORKS declară că acest dispozitiv UBIQUITI NETWORKS este în conformitate cu cerințele esențiale și alte prevederi relevante ale Directivei 1999/5/CE.                              |

## Online Resources

Support [support.ubnt.com](http://support.ubnt.com)

Community [community.ubnt.com](http://community.ubnt.com)

Downloads [downloads.ubnt.com](http://downloads.ubnt.com)



©2013-2014 Ubiquiti Networks, Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, the Ubiquiti beam logo, TOUGHCable, TOUGHSwitch, and UniFi are trademarks or registered trademarks of Ubiquiti Networks, Inc. in the United States and in other countries. All other trademarks are the property of their respective owners.

RR032714