



EAP1300
EAP1300EXT

EnTurbo™ Series Indoor Next-Gen 11ac Wave 2 Indoor Access Points

Turbocharged Wireless

EnTurbo Indoor Access Points turbocharge wireless speed, coverage, and reliability. EnTurbo makes powerful, next generation Wave 2, business-class Wi-Fi affordably accessible for small to mid-size businesses and large residences.

Turbocharged Performance

EnTurbo's powerful onboard Qualcomm® 717 MHz quad-core processors turbocharge wireless performance and efficiency with up to 30 percent faster throughput compared to 11ac Wave 1 3x3 access points. Combined with new 11ac technology, EnTurbo APs maximize speed and performance, support greater user device capacity and enhanced connection reliability.

Features & Benefits

- Quad-Core CPU, 717 MHz "Turbo Engine"
- 11ac Wave 2 Wireless Speeds to 867 Mbps (5 GHz); to 400 Mbps (2.4 GHz)
- Up to 30% Faster Throughput Over 11ac Wave 1 3x3 APs
- Ceiling-Mount, Integrated or Detachable High-Gain Antennas
- MU-MIMO Improves Performance & Device Capacities
- Beamforming Optimizes Antenna Signal, Reception & Reliability for Clients
- 802.3af PoE for Easy Placement Where Outlets are Scarce
- Suite of Advanced AP Management & Security Features
- Flexible Operation Modes: AP & WDS
- Simple Web-Based AP Monitoring & Management Software
- Stand-Alone or Manage APs via EnGenius Switches or ezMaster™ Software



Next Generation Wireless Technology

Replace your old wireless with new, advanced 11ac Wave 2 Technology.




Maximized Speed & Performance

The feature-rich EAP1300 Series leverages the advanced 11ac Wave 2 Wi-Fi technology that maximizes wireless speed and performance while eliminating network lag. EnTurbo APs reach speeds up to 867 Mbps on 5 GHz and up to 400 Mbps on the 2.4 GHz frequency band.




Improved Signal Reliability

Beamforming Antenna technology directs and adjusts signal beams as staff or customers move throughout the area, ensuring optimal signal and reception reliability.



Increased User Capacities

Multi-User (MU) MIMO sends dedicated wireless streams to multiple user devices at the same time, improving your network's efficiency.



Future-Proof Network

Upgrade from slower, older technology while supporting the future needs of IoT and mobile technology. Ensure your network against further upgrades for the next five years.

Indoor Form & Function

Clean lines and low profile housing ensure the EAP1300's ceiling-mount design blends seamlessly into most deployment environments.

Maneuver EAP1300EXT's four detachable antennas to ensure optimal signal alignment, increasing the effectiveness of your network deployment. You may also opt to remove the antennas and replace them with higher gain antennas to further amplify your wireless range.

Far-Reaching Wireless Blankets Coverage


Wide reaching, detachable 360-degree antennas minimize interference for blanketed coverage through floors, ceilings and walls to provide far-reaching reliable connectivity.

Reliable Connectivity & Network Protection

Configure multiple APs to ensure seamless, reliable connectivity for users as they move about the network with standards-based roaming. Efficiently steer dual-band clients to the less congested 5 GHz band for improved traffic management. Quickly detect and avoid network threats through a suite of advanced security features including Guest Networks and email alerts.

Flexible Power Options

Connect and power the EnTurbo Indoor APs via their Gigabit 802.3af Power-over-Ethernet ports for discrete placement in locations where power outlets are limited or unavailable, such as ceilings, hallways, rafters and attics. Place the APs up to 328 feet from a PoE-compliant switch or PoE adapter.

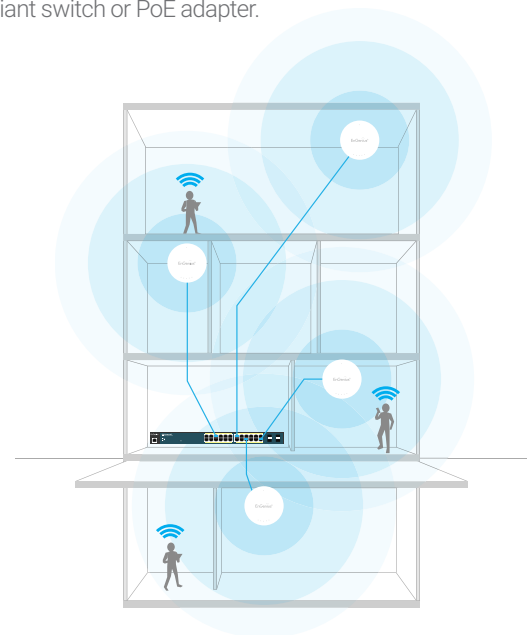


ezMaster™

Network Management

The EnTurbo Indoor APs can operate as a stand-alone AP or as part of a scalable EnGenius Wireless Network Management Solution, centrally managed by ezMaster, and expandable as your network needs grow.

Manage Up to 50 EnTurbo APs with EnGenius Managed Switches

Any EnGenius Gigabit Managed Switch can also manage up to 50 EnTurbo APs. Through the switch, access all connected EnGenius devices and a full array of wireless and Layer 2 management tools. Choose between PoE+ and non-PoE switch models with flexible deployment and management options and no AP license or subscription fees.

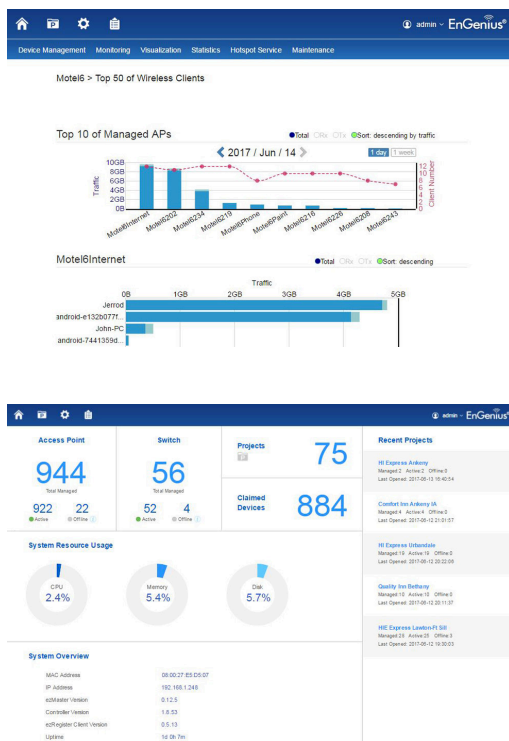

System Requirements

Recommended environment for managing up to 500 APs

CPU: Intel® Core™ i7 quad-core or above
RAM: 4 GB minimum
HDD: 500 GB (actual requirement dependent on log size)
OS: Microsoft® Windows® 7 or later + VMware® Player 7.0 or compatible virtualization software

Recommended environment for managing up to 1,000+ APs

CPU: Intel® Xeon® Processor E3 or above
RAM: 4 GB minimum
HDD: 500 GB (actual requirement dependent on log size)
OS: Microsoft® Windows® 7 or later + VMware® Player 7.0 or compatible virtualization software

Browser Requirements

Internet Explorer 10 or better
Firefox 34.0 or better
Chrome 31.0 or better
Safari 8.0 or better

Network Topology Requirements

At sites where APs are deployed: A DHCP-enabled network for APs to obtain an IP address

ezMaster Network Management Software

EnGenius ezMaster Software's simple, intuitive Web-based interface allows flexible access point monitoring - locally or remotely. Quickly and easily set up, manage, monitor, and troubleshoot multiple APs at the same time. See real-time network performance and monitor AP traffic through ezMaster's at-a-glance dashboard.

EzMaster provides business-class features, unlimited scalability and centralized management of hundreds of EnTurbo Access Points and EnGenius Switches - locally, remotely or via a cloud-based service, with no licensing or subscription fees.

ezMaster Software Features

- **Centralized Management**
 - Configure, Manage & Monitor
 - Cross-Network AP Management
 - AP Group Configuration
- **Access Point Configuration & Management**
 - Band Steering (Auto Band Steering & Band Balancing)
 - Client Isolation
 - Client Limiting
 - Fast Roaming
 - L2 Isolation
 - LED On/Off Control
 - Multiple SSID
 - RSSI Threshold
 - Secure Guest Network
 - Traffic Shaping
 - VLAN Isolation
 - VLAN Tag
- **Comprehensive Monitoring**
 - Device Status Monitoring
 - Floor Plan View
 - Map View
 - System Status Monitoring
 - Visual Topology View
 - Wireless Client Monitoring
 - Wireless Coverage View
 - Wireless Traffic & Usage Statistics
- **Management & Maintenance**
 - Bulk Firmware Upgrade
 - Email Alert
 - Kick/Ban Clients
 - One-Click Update
 - Remote Logging
 - Seamless Migration
 - Syslog

EnTurbo Series Indoor Access Points



Models	EAP1300	EAP1300EXT
Standards	802.11a/b/g/n/ac	802.11a/b/g/n/ac
Frequency	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz
2.4 GHz Max. Data Rate	400 Mbps	400 Mbps
5 GHz Max. Data Rate	867 Mbps	867 Mbps
Radio Chains/Streams	2 x 2:2	2 x 2:2
RF Output Power (2.4 GHz)	23 dBm	23 dBm
RF Output Power (5 GHz)	23 dBm	23 dBm
Ethernet Ports	1 x Gigabit PoE	1 x Gigabit PoE
Power-over-Ethernet	802.3af	802.3af
Power Consumption (Peak)	9W	9W
Integrated Antenna	2 x 5 dBi Omni-Directional	N/A
External Antenna	N/A	4 x 5 dBi Omni-Directional Detachable SMA-Type

Technical Specifications

Standards

IEEE 802.11b/g/n on 2.4 GHz

IEEE802.11a/n/ac on 5 GHz

Processor

Qualcomm® 717 MHz Quad-Core CPU

4x ARM Cortex A7

Antennas

EAP1300

2 x 5 dBi Omni-Directional Integrated

EAP1300EXT

4 x 5 dBi Omni-Directional Detachable (SMA-Type)

Physical Interface

10/100/1000 Gigabit Ethernet Port

DC Jack

Reset Button

Kensington Security Slot

LED Indicators

Power

LAN

2.4 GHz

5 GHz

Power Source

Power-over-Ethernet: 802.3af Input

IEEE 802.11e Compliant Source

12VDC /1A Power Adapter

Maximum Power Consumption

9W

Surge Protection

0.5KV

Wireless & Radio Specifications

Operating Frequency

Dual-Radio Concurrent 2.4 GHz & 5 GHz

Operation Modes

Access Point Mode (AP mode)

WDS: WDS AP, WDS Bridge

Frequency Radio

2.4 GHz: 2400 MHz~2472 MHz

5 GHz: 5150 MHz~5250 MHz, 5250 MHz~5350 MHz,
5470 MHz~5725 MHz, 5725 MHz~5850 MHz

Transmit Power

2.4 GHz: 23 dBm

5 GHz: 23 dBm

Tx Beamforming (TxBF)

Radio Chains/Spatial Stream

2x2:2

SU-MIMO

Two (2) Spatial Streams SU-MIMO up to 1267 Mbps to a single client

MU-MIMO

Two (2) Spatial Streams MU-MIMO up to 1267 Mbps to two (2) MU-MIMO capable wireless devices simultaneously

Technical Specifications continued

Supported Data Rates (Mbps):

2.4 GHz: Max 400

5 GHz: Max 867

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 400 Mbps (MCS0 to MCS15)

802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2)

Supported Radio Technologies

802.11b: Direct-Sequence Spread Spectrum (DSSS)

802.11a/g/n/ac: Orthogonal Frequency-Division Multiplexing (OFDM)

802.11n/ac: 2x2 MIMO with 2 Streams

Channelization

802.11ac Supports Very High Throughput (VHT)—VHT 20/40/80 MHz

802.11n Supports High Throughput (HT)—HT 20/40 MHz

802.11n Supports Very High Throughput (VHT) Under the 2.4 GHz Radio—VHT 40 MHz (256-QAM)

802.11n/ac Packet Aggregation: AMPDU, ASPDU

Supported Modulation

802.11b: BPSK, QPSK, CCK

802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM

802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

Management

Multiple BSSID

Supports 16 SSIDs (8 SSIDs per Band)

VLAN Tagging

Supports 802.1q SSID-to-VLAN Tagging

Cross-Band VLAN Pass-Through

Management VLAN

Spanning Tree

Supports 802.1d Spanning Tree Protocol

QoS (Quality of Service)

Compliant With IEEE 802.11e Standard

WMM

SNMP

v1, v2c, v3

MIB

I/II, Private MIB

Management Features

Deployment Options

Stand-Alone (Individually Managed)

Managed Mode (w/ezMaster & Neutron Switch)

Stand-Alone Management Features

Auto Channel Selection

Auto Transmit Power

Wireless STA (Client) Connected List

Guest Network

Fast Roaming (802.11k & 802.11r)

Pre-Authentication (802.11i, 802.11x)

PMK Caching (802.11i)

RSSI Threshold

Band Steering

Traffic Shaping

VLANs for Access Point – Multiple SSIDs

Backup/Restore Settings

Auto Reboot

E-Mail Alert

Site Survey

Save Configuration as Default

Control Features

Managed Mode (w/ezMaster/Neutron Switch)

Distance Control (ACK Timeout)

Multicast Supported

Wi-Fi Scheduler

Client Traffic Status

RADIUS Accounting (802.1x)

Power Save Mode (U-APSD Support)

CLI Support

HTTPS

Wireless Security

WEP Encryption 64/128/152 bit

WPA/WPA2 Enterprise (WPA-EAP using TKIP or AES)

Hide SSID in Beacons

MAC Address Filtering, Up to 32 MACs per SSID

Wireless STA (Client) Connected List

SSH Tunnel

Client Isolation

Wireless Management Features (w/ezMaster & Neutron Switch) (Available in AP Mode)

AP Auto Discovery & Provisioning

AP Auto IP Assignment

AP Group Management

Auto AP Rebooting

AP Device Name Editing

AP Radio Settings

Band Steering

Traffic Shaping

Fast Roaming (802.11k & 802.11r)

Pre-Authentication (802.11i, 802.11x)

PMK Caching (802.11i)

RSSI Threshold

AP Client Limiting

Client Fingerprinting

AP VLAN Management

Wireless Management Features (w/ezMaster & Neutron Switch) (Available in AP Mode) continued

VLANs for AP - Multiple SSIDs

Secured Guest Network

Access Point Status Monitoring

Wireless Client Monitoring

Email Alert

Wireless Traffic & Usage Statistics

Real-Time Throughput Monitoring

Visual Topology View

Floor Plan View

Map View

Wireless Coverage Display

Secure Control Messaging (SSL Certificate)

Local MAC Address Database

Remote MAC Address Database (RADIUS)

Unified Configuration Import/Export

Bulk Firmware Upgrade Capability

One-Click Update

Intelligent Diagnostics

Kick/Ban Clients

Wi-Fi Scheduler

Temperature Range

Operating: 32° F~104° F (0° C~40° C)

Storage: -22° F~176° F (-30° C~80° C)

Humidity (non-condensing)

Operating: 90% or less

Storage: 90% or less

Dimensions & Weights

EAP1300

Weight: 0.62 lbs. (0.28 kg)

Diameter: 6.36" (161.54 mm)

Height: 1.64" (41.66 mm)

EAP1300EXT

Weight: 0.65 lbs. (0.29 kg)

Diameter: 6.36" (161.54 mm)

Height: 1.85" (47 mm)

Package Contents

EAP1300

EAP1300 Indoor Access Point

Power Adapter (12V/1A)

T-Rail Mounting Kits

Ceiling & Wall Mount Screw Sets

Mounting Brackets

RJ-45 Ethernet Cable

Quick Installation Guide

Technical Specifications continued

Package Contents continued

EAP1300EXT

EAP1300EXT Indoor Access Point

Power Adapter (12V/1A)

(4) 5 dBi SMA Antennas

T-Rail Mounting Kits

Ceiling & Wall Mount Screw Kits

Mounting Brackets

RJ-45 Ethernet Cable

Quick Installation Guide


Certifications

FCC, CE


Warranty

1-Year Standard

EAP1300 Indoor Access Point

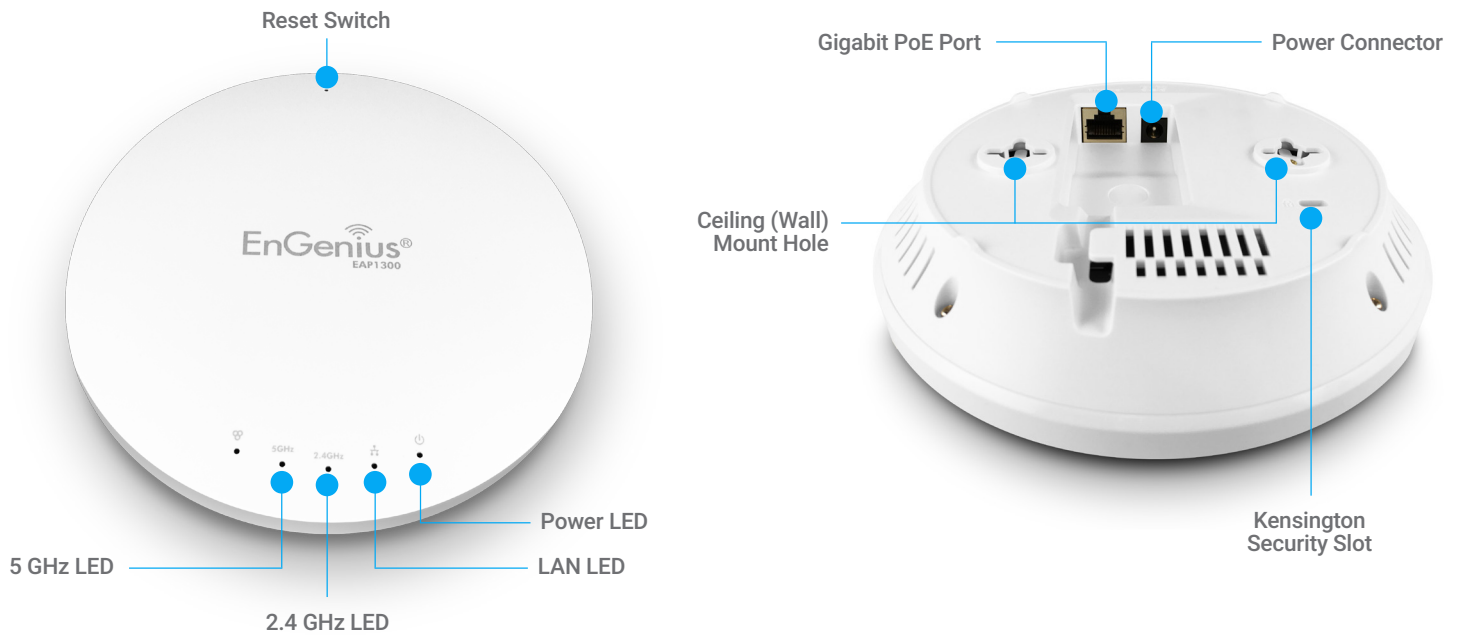

EAP1300EXT Indoor Access Point

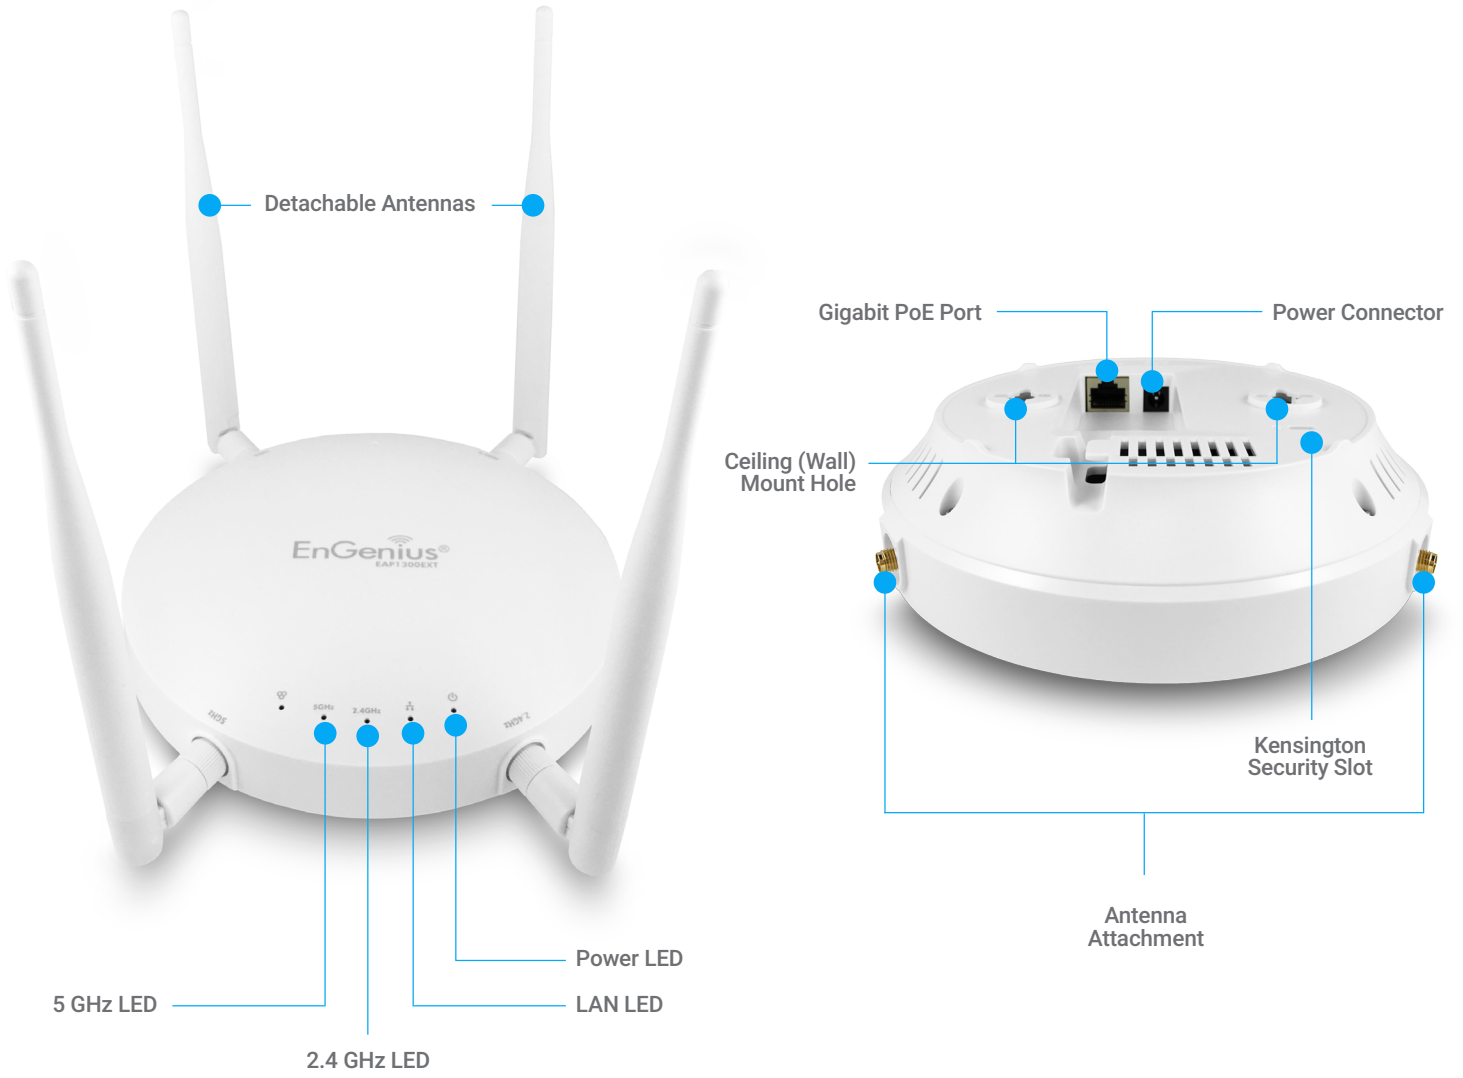

Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on distance between devices or traffic and bandwidth load in the network.

EnGenius Technologies | 1580 Scenic Ave. Costa Mesa, CA 92626

Email: partners@enginustech.com | Phone: 888-735-7888 | Website: enginustech.com

Version 1.0 07/07/2017

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright © 2017 EnGenius Technologies, Inc. All rights reserved.