


# GP-24


## 2.4GHz Omnidirectional Base Antenna

### Specifications

- 2400-2500Mhz
- 802.11b and 802.11g standards
- **VSWR:** Less than 1.5:1
- **Gain:** 12dBi
- **Length:** 5 ft 10 inches
- **Weight:** 2 lbs 9 oz
- **-3dB Beam-width:** 5 degrees
- **Cross polar rejection:** 14dB+
- **Max Power:** 100 watts
- **Max Wind Survival:** 135MPH
- **Wind Load:** 35.3 sq in (.245 sq ft)
- **Mast Required:** 1.25-2.5 inches
- **Connector:** Integral N- female
- **Radome:** One piece white UV stabilized fiberglass.
- **Extruded aluminum/stainless steel mounting hardware included**

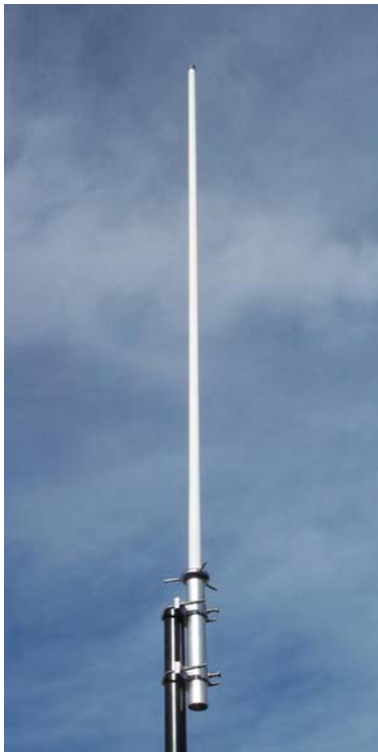

### Vertical radiation pattern

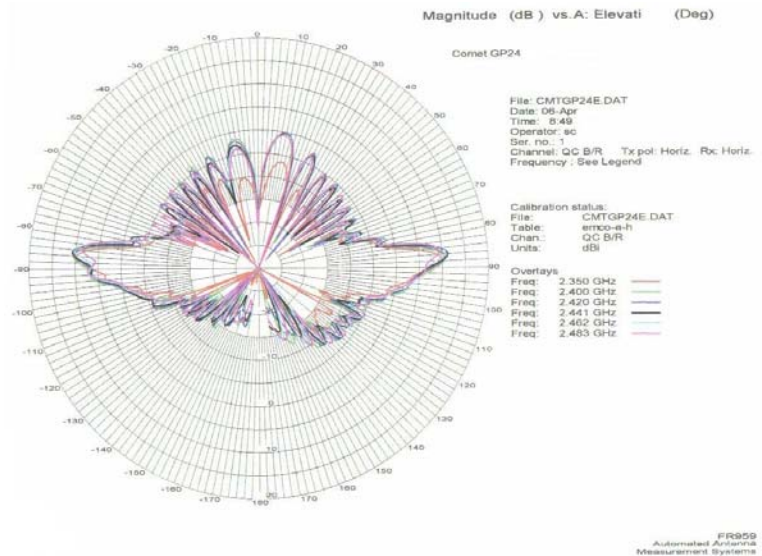

### FEATURES

- **Extremely high gain omnidirectional pattern for long range point-to-multipoint applications.**
- **Heavy duty fiberglass radome, 134+ MPH wind survival.**
- **Extruded aluminum mounting brackets, stainless steel U-bolts/hardware.**
- **Mounting pipe acts as a shroud to protect the coax to antenna connection from the weather.**
- **Ideal for the license free 2.4GHz ISM band 802.11b and 802.11g standards.**



**NCG Company** 1275 N. Grove St. Anaheim, CA 92806-2114  
Phone: 800.962-2611 Fax: 714.630-4541  
email: micks@cometantenna.com